



Dopyt

SNÍMAČE TEPLOTY

Séria TR34

TR34-14115539
M12x1 -30-150°C PT100 G1/4 50x6mm ATEX

- Výstup 4-20mA
- Teplota -30 až 250°C
- Pripojenie G, NPT
- Média voda, plyny, oleje
- ATEX, IECEx




POPIS PRODUKTU

ŠPECIFIKÁCIA

Connection	G1/4
Insertion length	50 mm
Materiál kontaktnej časti	Nerezová oceľ
Materiál tela	Nerezová oceľ
Napájacie napätie DC max.	30 V DC
Napájacie napätie DC min.	10 V DC
Plug diameter	6 mm
Prevádzková teplota max.	150 °C
Prevádzková teplota min.	-30 °C
Teplota okolia do	85 °C
Teplota okolia od	-40 °C
Trieda krytia	IP67
Zhoda s normami	ATEX

Dimensions in mm


Process connection with parallel threads (or without process connection)

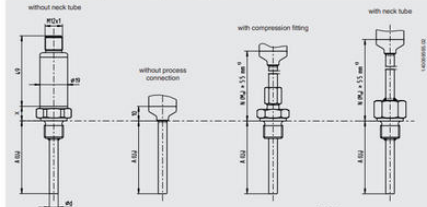

Legend:
 A (A) Insertion length
 N (N) Neck length
 X (X) Height process connection
 Ds (Ds) Sensor diameter

Thread	Height process connection X
G 1/4	11
G 3/8	11
G 1/2	10
M 12	11
M 20	11

Process connection with tapered thread

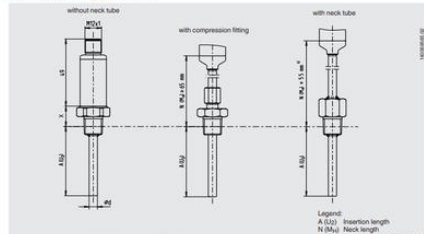


Legend:
 A (A) Insertion length
 N (N) Neck length
 X (X) Height process connection
 Ds (Ds) Sensor diameter

Thread	Height process connection X
1/4 NPT	15
3/8 NPT	10


Electrical connection

Output signal 4 ... 20 mA



Pin	Signal	Description
1	L+	10 ... 30 V
2	VD	not connected
3	L-	0 V
4	C	not connected

Output signal P1100 or P11000 sensor



Configuration software WIKAsoft-TT

