

**12" MONITOR**

ORL0411000

Monitor 12" RLED R4

- 12-30 V DC
- Prevádzková teplota -40 až +85 ° C
- Rozlíšenie XGA 1024xRGBx768 pixelov

**POPIS PRODUKTU**

12-palcový monitor je perfektný, keď chcete vidieť viac ako jeden obraz naraz, napríklad, ak chcete použiť Orlaco "Surroundview". Tieto monitory majú stupeň krytia IP67 a automatické nastavenie svetla.

ŠPECIFIKÁCIA

Dĺžka kábla	4000 mm
Image Format	4:3
Napájacie napätie DC max.	30 V DC
Napájacie napätie DC min.	12 V DC
Odolnosť proti vibráciám	50 g
Prevádzková teplota max.	85 °C
Prevádzková teplota min.	-40 °C
Trieda krytia	IP67
Type	Analóg
Veľkosť displeje	12 "

Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
- 2 = White = Power input: 0V
- 3 = Blue = Cam No. 1 activated at 12...30V
- 4 = Brown = Cam No. 2 activated at 12...30V
- 5 = White/Yellow = Cam No. 3 activated at 12...30V
- 6 = Grey = Aux 1 activated at 12V...30V
- 7 = Yellow = Aux 2 activated at 12V...30V
- Shielding = To GND

Front side molded 4p female connector:

- 1 = Coax core = Video input
- 2 = Coax shielding = Video 0V
- 3 = Red = Power output: 12...30V
- 4 = Black = Power output: 0V
- Shielding = To housing




Electrical connection

Connections to the monitor: (Secure the power input with a 5A fuse)

- 1 = Red = Power input: 12...30V
- 2 = White = Power input: 0V
- 3 = Blue = Cam No. 1 activated at 12...30V
- 4 = Brown = Cam No. 2 activated at 12...30V
- 5 = White/Yellow = Cam No. 3 activated at 12...30V
- 6 = Grey = Aux 1 activated at 12...30V
- 7 = Yellow = Aux 2 activated at 12...30V
- Shielding to GND

Solder side 7p female connector:


- 1 = Coax core = Video input
- 2 = Coax shielding = Video 0V
- 3 = Red = Power output: 12...30V
- 4 = Black = Power output: 0V
- 5 = Orange = RS232 In
- 6 = Yellow = RS232 Out
- 7 = Grey = Video 2 input
- Shielding to housing

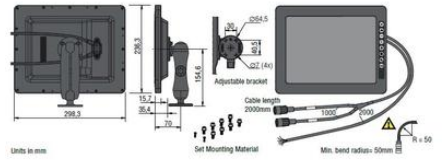

Units in mm

Set Mounting Material

Min. bend radius: 50mm

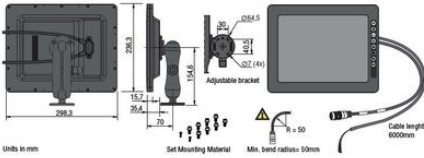

Units in mm

Set Mounting Material

Min. bend radius: 50mm

Cable length: 2000mm