



Dopyt




# ELEKTROMAGNET ERM

Séria ERM

ERM100/35

- Obdĺžnikový elektromagnet
- Vinutie triedy B (130°C)
- 100 % pracovný cyklus
- Sila až 7450N
- K dispozícii špeciálne prevedenie

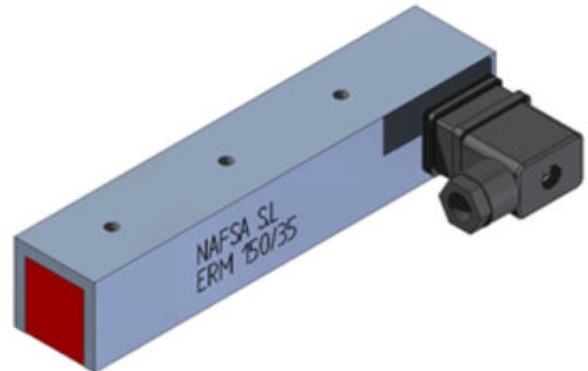

## POPIS PRODUKTU ŠPECIFIKÁCIA

Duty cycle	100 %
Insulation class	B (130°C)
Max. napätie DC	24 V
Total weight	900 g
Trieda krytia	IP65
Výkon	10 W

TYPE	P at 20°C (W)	e (mm)	Airgap (mm)				
			0	0,1	0,2	0,5	1
ERM100/35	1	32	22	12	6	6	
	3	396	308	120	45	8	
	6	694	328	190	52	12	
ERM150/35	1	1090	657	365	90	21	
	3	1450	904	490	116	35	
	6	1810	1151	615	142	50	
ERM200/35	1	80	60	42	28	14	
	3	928	720	260	94	20	
	6	1800	810	460	121	27	
ERM400/35	1	172	131	91	60	35	
	3	2100	1400	837	210	45	
	6	3060	1722	982	263	60	
ERM500/35	1	210	150	100	60	36	
	3	2323	1806	674	234	56	
	6	3540	2100	1114	255	70	
ERM600/35	1	226	173	96	66	40	
	3	2653	2053	706	266	66	
	6	4053	2256	1286	346	80	
ERM150/60	1	140	112	102	75	50	
	3	750	650	600	445	100	
	6	1600	1490	1100	610	200	
ERM200/60	1	190	150	125	85	210	
	3	1130	990	890	680	250	
	6	2550	2100	1800	884	300	
ERM500/60	1	205	165	155	116	72	
	3	1130	990	890	680	250	
	6	2550	2100	1800	884	300	

Magnetic force Fm (N)

TYPE	A	B	C	D	E	F	H	NP of holes	Compression stand	Weight(kg)
ERM100/35	125						10	2		0,9
ERM150/35	175						10	3		1
ERM200/35	225	35x0.3	34x0.1	25	50		10	4	PG-9	1,5
ERM400/35	425						12	6		2,8
ERM500/35	525						12	10		3,5
ERM600/35	625						12	12		4,5
ERM150/60	180			40	70		12	2		2,3
ERM200/60	230	60x0.1	49.5x0.2	40	120		12	2	PG-11	3
ERM500/60	530			70	120		12	4		7,8

