



Dopyt



KOMBINOVANÁ SIRÉNA CS1 S BLIKAČOM, PRIEMER 93 MM

Série CS1

C111221005

CS1 siréna/záblesk LED oranžový 24 V

- Rýchla inštalácia vďaka systému bajonetových zámkov
- Výber z 32 tónov
- Akustická intenzita 86 - 106 dB
- Krytie IP65



POPIS PRODUKTU

Sirény pre vnútorné a vonkajšie použitie (IP 65), druh tónu je voliteľný DIP-prepínačom vnútri. Oba typy možno objednať v bielej a červenej farbe.

ŠPECIFIKÁCIA

Druh montáže	Horizontálny, Vertikálny
Farba	Oranžová
Farba tela	Biela
Frekvencia blikania	1 Hz
Frekvencia max	2900 Hz
Frekvencia min	440 Hz
Hladina zvuku max	109 dB
Hladina zvuku min	88 dB
Hmotnosť	258 g
Menovitý prúd max	0,041 A
Menovitý prúd min	0,014 A
Napájacie napätie	24 V
Napájacie napätie AC / DC max.	35 V
Napájacie napätie AC / DC min.	18 V
Ovládanie zvuku	Áno

Počet tónov	32 ks
Prevádzková teplota max.	70 °C
Prevádzková teplota min.	-20 °C
Trieda krytia	IP65
Typ zdroja	Oranžová LED
Zdroj svetla	LED




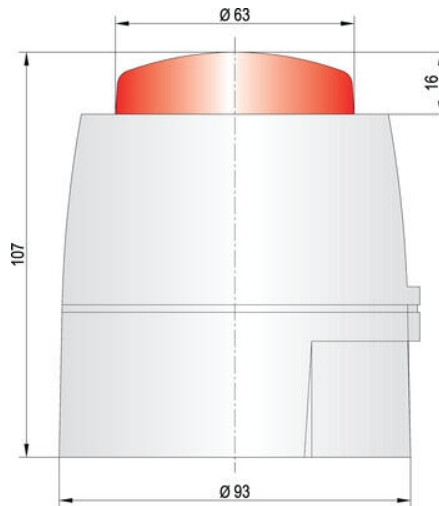


Tabelle / Tone table

No.	Sound	Tone frequency	DP-switch	2nd stage alarm (Hz)
1	LF Sweep	800 Hz on/0.5 sec	11111	800 cont
2	Alarm tone BS standard	800 Hz on/2s	11110	800 cont
3	Alarm tone BS standard	800 Hz on/0.5 sec	11101	800 cont
4	Alarm tone BS standard	800 Hz on/2s	11100	800 cont
5	LF Back up alarm tone	800 Hz on/1 sec on/off	11101	800 cont
6	LF Back up alarm	800 Hz on/1.5 sec on/off	11101	800 cont
7	LF Back up alarm tone - Int	800 Hz on/1.5 sec on/off	11100	800 cont
8	LF Chirp tone BS/BS2	800 Hz cont	11000	800 tone
9	Swamp tone (T1)	800 Hz on/1 Hz	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.225ms on/0.225ms off	10110	3.75 sec on / 0.25 sec off / 800-900
11	Dutch sweep tone	970Hz cont	10101	800 cont
12	Lockout warning tone	800 Hz on/2s	10100	800 cont
13	Swamp tone (T2)	800 Hz on/2s	10011	800 cont
14	Alarm LF slow sweep	800 Hz on/2s	10010	800 cont
15	Swamp tone	800 Hz on/2s	10001	800 cont
16	US Temporal Pattern LF	250Hz for 0.5 sec on 0.5 sec off x3	10000	800 cont
17	Intermittent tone BS standard	Intermittent tone 800Hz on/0.5 sec on/off	01111	800 cont
18	SD 800 LF BS/BS2 P1 P2	Intermittent 970Hz (200ms on/200ms off)	01110	800 tone
19	Intermittent tone BS	800 Hz on/0.5 sec on/off	01101	800 cont
20	SCRS LF	Intermittent 200Hz 100ms on/400ms off	01100	800 tone
21	Chirp tone	800 Hz on/off	01101	800 tone
22	LF Chirp	800 Hz on/off	01101	800 cont
23	LF Chirp tone	800 Hz	01001	800 cont
24	Swamp tone (T3)	800 Hz on/2s	01000	800 cont
25	Alarm LF tone	Intermittent 800 Hz on/1 Hz	00111	800 cont
26	Swamp tone (T4)	Intermittent 600Hz 150 ms on / 150 ms off	00110	800 tone
27	French tone AF 90	150Hz for 0.5 sec and 150Hz for 0.5 sec	00100	800 cont
28	Swamp tone (T5)	Intermittent 800 Hz	00100	800 tone
29	US Temporal Pattern HF	800 Hz on/0.5 sec on/0.5 sec off for 1.5 sec then repeat	00011	800 cont
30	Swamp 2 min ramp 1/short	800 Hz on/1.5 sec then 150 Hz on/2.5 sec	00010	800 cont
31	EP BS/1 - T1 tone	Intermittent tone 800/970 Hz on/2s	00000	800 cont
32	Swamp 2 min ramp 1/long	800 Hz on/1.5 sec then 150 Hz on/3 sec then 150 Hz on/3 sec	00000	800 cont

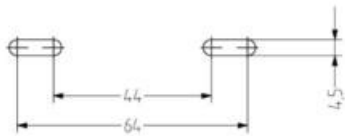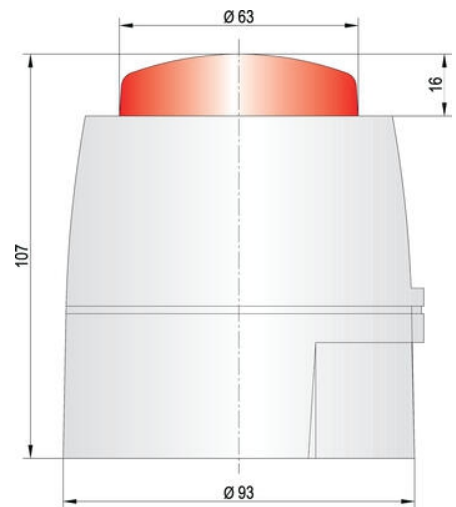

Nr.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	IF Buzzer	800-1000Hz at 0.5 sec	11111	800cont
2	Alarm tone on the 1st stage	800/900Hz at 2Hz	11110	800cont
3	Warning tone 1st stage	800/1000Hz at 0.5 sec	11101	800cont
4	Alarm tone on the 2nd stage	800/900Hz at 2Hz	11100	800cont
5	IF Buzzer at 1st stage	800Hz at 1.5 sec on/off	11011	800cont
6	IF Buzzer at 2nd stage	800Hz at 1.5 sec on/off	11010	800cont
7	IF Buzzer at 3rd stage	800Hz at 1.5 sec on/off	11001	800cont
8	IF Buzzer tone 2nd stage	800Hz cont	11000	800cont
9	Swarm tone 1 Hz	800/900Hz at 1Hz	10111	800cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	800cont 3.75 sec on 10.75 sec off
11	Dutch sweep tone	970Hz cont	10101	800cont 3.5 sec on 3.5 sec off
12	Swarm tone 2 Hz	800/900Hz at 2Hz	10100	800cont
13	Swarm tone 3 Hz	800/900Hz at 3Hz	10011	800cont
14	Alarm tone 1 Hz	800/900Hz at 1Hz	10010	800cont
15	Swarm tone	800/900Hz at 0.5 sec	10001	800cont
16	US Temporal Pattern 1F	900Hz for 0.5 sec on 0.5 sec off x3 then 1.5 sec then repeat	10000	800cont
17	Intermittent tone 800Hz	Intermittent tone 800Hz at 0.5 sec on/off	01111	800cont
18	800/800 Hz 800/800 Hz 1 Hz	Intermittent 970Hz 0.625ms on/0.625ms off	01110	800cont
19	Intermittent tone 800Hz	Intermittent 970Hz 0.625ms on/0.625ms off	01101	800cont
20	800/800 Hz	Intermittent 970Hz 0.625ms on/0.625ms off	01100	800cont
21	Swarm tone	800Hz cont	01011	800cont
22	IF Buzzer	800/900Hz at 0.5 sec on/off	01010	800cont
23	IF Buzzer tone	800Hz	01001	800cont
24	Swarm tone 2 Hz	800/900Hz at 2Hz	01000	800cont
25	Swarm tone 3 Hz	800/900Hz at 3Hz	00111	800cont
26	Swarm tone 4 Hz	Intermittent 650Hz 150ms on / 500ms off	00110	800cont
27	Swarm tone at 5 Hz	Intermittent 650Hz 150ms on / 500ms off	00101	800cont
28	Swarm tone at 6 Hz	Intermittent 650Hz 150ms on / 500ms off	00100	800cont
29	US Temporal Pattern 1F	900Hz for 0.5 sec on 0.5 sec off for 1.5 sec then repeat	00011	800cont
30	Swarm tone 7 Hz	800/900Hz at 7Hz	00010	800cont
31	IF Buzzer 1 Hz	Intermittent 970Hz 0.625ms on/0.625ms off	00001	800cont
32	Swarm tone 8 Hz	800/900Hz at 8Hz	00000	800cont

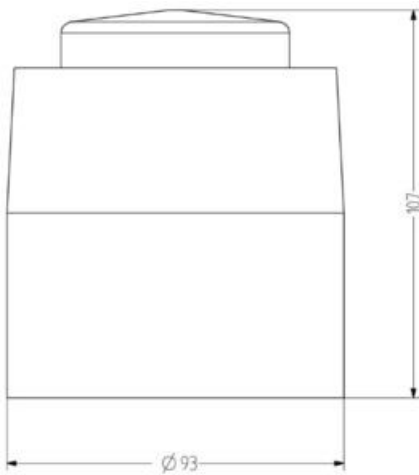